


# RB-30GM

## 02&03 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/20~1/100	23.0	1/120~1/1000	28.0

外形尺寸 APPEARANCE SIZE

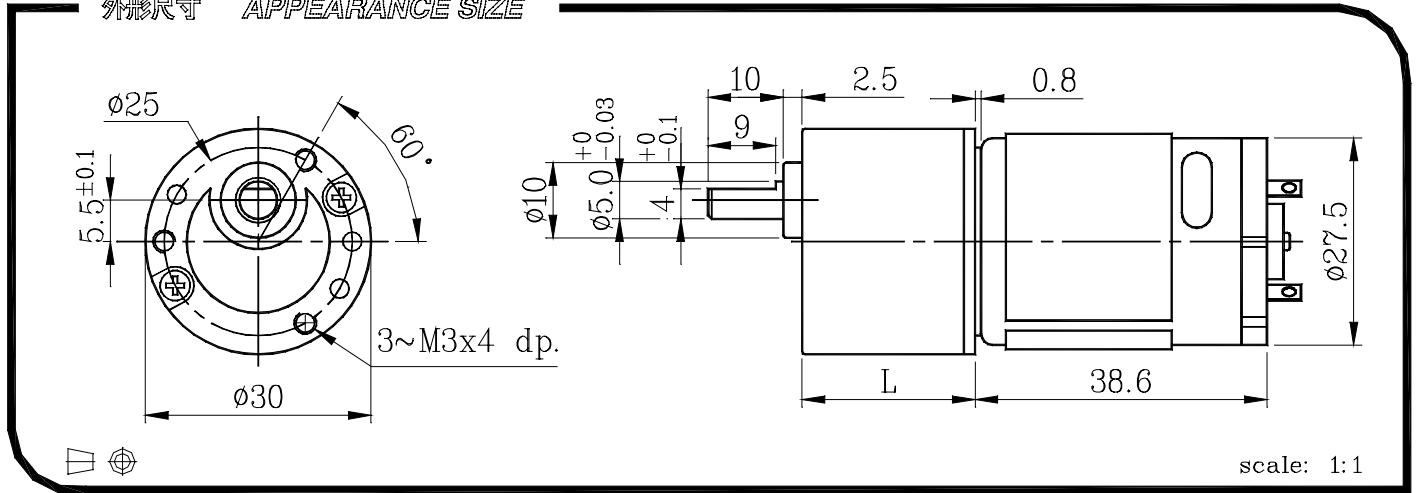

scale: 1:1

### GEARED MOTOR TORQUE/SPEED

減速比 Reduction ratio	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	20	30	36	50	60	75	90	100	120	150	180	200	250	300	400	500	600	810	900	1000
12V 定格扭力(kg-cm) Rated torque	1.0	1.5	1.5	2.0	2.0	3.0	3.0	3.0	4.0	4.0	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
12V 定格回轉數(rpm) Rated speed	260	170	153	110	93	73	61	55	46	38	32	29	24	19.5	15	12	10.3	7.7	7.0	6.3
24V 定格扭力(kg-cm) Rated torque	1.0	1.5	1.5	2.0	2.0	3.0	3.0	3.0	4.0	4.0	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
24V 定格回轉數(rpm) Rated speed	258	170	152	110	93	73	61	55	46	38	32	29	24	19.5	15	12	10.3	7.7	7.0	6.3

### 馬達單體型式

### MOTOR INSTALLATION

定格電壓(V) Rated volt	定格扭力(g-cm) Rated torque	定格回轉數(rpm) Rated speed	定格電流(mA) Rated current	無負荷回轉數(rpm) No load speed	無負荷電流(mA) No load current	定格出力(W) Rated output
12	78	5290	≤530	6500	≤150	4.22
24	74	5250	≤250	6500	≤85	3.97

### 馬達單體特性圖

### MOTOR CHARACTERISTICS

